



# 2360 H1 PW19-IL 4000-830 ETDD

TOC: 7377551

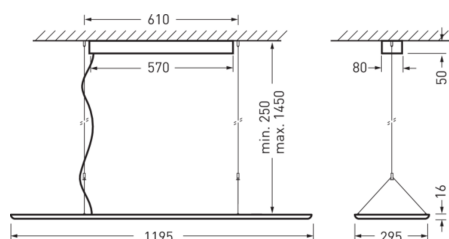

## Product description

### Luminaire type

LED suspended luminaire with translucent PMMA cover. Suspended luminaire for single luminaire applications.

### Light management

The luminaire is DALI-dimmable and can be integrated into the TRILUX LiveLink light management system.

### Mounting methods

Y wire suspension for suspension lengths to 1450 mm. Y-wire suspension and electric connection cable included in scope of supply.

### Optical system

With symmetric limited wide light distribution. Glare evaluation according to UGR rating (EN 12464-1) < 19. Suitable for VDU workstations according to EN 12464-1 via limited luminance  $L \leq 3000 \text{ cd/m}^2$  for beam angle above 65° all-round.

### LED system

Luminaire luminous flux and light color fixed. Luminaire luminous flux 4400 lm, connected load 40 W, Power Factor  $\lambda > 0,95$ , maximum luminous efficiency of luminaire 110 lm/W. Light colour warm white, correlated colour temperature (CCT) 3000 K, general colour rendering index (CRI)  $R_a > 80$ . Colour locus tolerance (initial MacAdam)  $\leq 5 \text{ SDCM}$ . Mean rated service life  $L70 (t_q 25^\circ\text{C}) = 50,000 \text{ h}$ .

### Luminaire body

Luminaire body of extruded aluminium profile. Surface coated white (similar to RAL 9016). Dimensions (L x W): 1195 mm x 295 mm, luminaire height 16 mm. Safety class (EN 61140): I, protection rating (DIN EN 60529): IP20, impact resistance level in accordance with IEC 62262: IK02, testing temperature of wire glow test in accordance with IEC 60695-2-11: 650 °C. Permissible ambient temperature ( $t_a$ ): 25 °C. Weight: 5,5 kg.

### Electrical version

With external operating device, digitally dimmable (DALI). Control gear unit according to DALI-2 standard (EN 62386). Luminaire is switchable and dimmable by means of touch functionality via DALI control terminals (Touch DIM). The control gear unit is replaceable in accordance with the ecodesign requirements (VO (EU) 2019/2020). The luminaire complies with the fundamental requirements of applicable EU regulations and product safety legislation and bears the CE symbol. The luminaire is also ENEC-certified by an independent testing authority.

Disassembly instructions (PDF) for the product available at: <https://www.trilux.com/EcoDesign>

## Product features and key data

<b>Luminaire type</b>	LED suspended luminaire with translucent PMMA cover.
<b>Mounting method</b>	Suspension
<b>Light distribution curve</b>	Wide reduced glare UGR19 (W19)
<b>FWHM</b>	77,80 °
<b>Light Engine</b>	standard product
<b>Colour temperature</b>	3000 K
<b>Rated luminous flux</b>	4400 lm
<b>Connected load</b>	40,00 W
<b>Luminous efficacy</b>	110 lm/W
<b>Rated service life</b>	$L70 (25^\circ\text{C}) = 50.000 \text{ h}$
<b>Colour rendering index</b>	80
<b>Colour tolerance</b>	5 SDCM

## Product features and key data

Photobiological class	Group 0 - no risk
Luminaire colour	RAL9016 Traffic white
Luminaire body	Luminaire body of extruded aluminium profile.
Electrical version	With external operating device, digitally dimmable (DALI).
DALI-2-Standard EN 62386	Yes
Connection method	Plug-in terminal
Touch-Dim-capable	Yes
Number of DALI addresses	1
Dimming range	5 - 100 %
Mains voltage	220 - 240 V
Mains frequency	50/60 Hz
Total harmonic distortion < %	14 %
Ingress Protection (IP) rating	IP20
Protection rating on room side	IP20
Protection class	I
Impact resistance (IK)	IK02
Hot wire resistance	650 °C
Ambient temperature	25 °C
Max. Luminaires B10	15
Max. Luminaires B16	24
Max. Luminaires C10	24
Max. Luminaires C16	39
Net length	1.195 mm
Net width	295 mm
Net height	16 mm
Weight	5,5 kg

## Available accessories

Material	Description
4601700	Ceiling canopy, round. Colour white.
4601800	Ceiling canopy, round. Colour silver-grey.
4691700	Ceiling canopy for connection of the 5-pole mains cable in case of ceiling outlets. Square, white.
4691800	Ceiling canopy for connection of the 5-pole mains cable in case of ceiling outlets. Square, silver-grey.
7002300	Ceiling canopy, square, white.
7002400	Ceiling canopy, square, silver grey.

**EPREL - European Product Registry for Energy Labelling**

Energy Efficiency Class

Model identifier

E

10249760

**For more sustainability in day-to-day business****New  
packing**CO<sub>2</sub> OPTIMISED

NO PLASTIC



ONLY ONE MATERIAL



100% RECYCLABLE

[www.trilux-twenty3.com/eco](http://www.trilux-twenty3.com/eco)