



# 2350 G4 D3 PW19 60/40/ML-8MC ET

## LED surface-mounted luminaire

TOC: 8537540

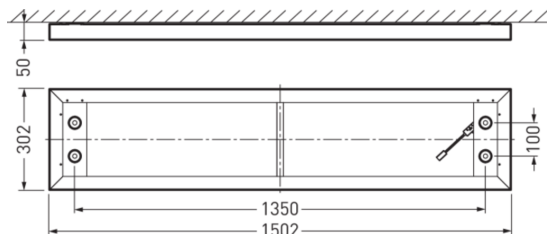

## Product description

### Luminaire type

Surface-mounted LED ceiling luminaire with translucent PMMA cover.

### Applications

Offices, Corridors, Foyers, Conference rooms, Retail areas, waiting zones, Education, Care homes.

### Mounting methods

For ceiling mounting indoors.

### Optical system

Cover of translucent PMMA with photometrically effective prism structure. With symmetric limited wide light distribution. Glare evaluation according to UGR rating (EN 12464-1) < 19.

### LED system

Luminaire luminous flux adjustable in 2 steps. Luminaire luminous flux 4000 lm - 6000 lm, connected load 38 W - 54 W, Power Factor  $\lambda > 0,95$ , maximum luminous efficiency of luminaire 111 lm/W. Light colour neutral white, correlated colour temperature (CCT) 4000 K, general colour rendering index (CRI)  $R_a > 80$ . Colour locus tolerance (initial MacAdam)  $\leq 5$  SDCM. Mean rated service life L65( $t_a$  25 °C) = 50,000 h.

### Luminaire body

Luminaire body of aluminium. Surface coated white (RAL 9016). Dimensions (L x W): 1502 mm x 302 mm, luminaire height 50 mm. Safety class (EN 61140): I, protection rating (DIN EN 60529): IP20, impact resistance level in accordance with IEC 62262: IK02, testing temperature of wire glow test in accordance with IEC 60695-2-11: 650 °C. Weight: 4,2 kg.

### Electrical version

With electronic control gear unit, switchable. The control gear unit is replaceable in accordance with the ecodesign requirements (VO (EU) 2019/2020). The luminaire complies with the fundamental requirements of applicable EU regulations and product safety legislation and bears the CE symbol. The luminaire is also ENEC-certified by an independent testing authority.

Disassembly instructions (PDF) for the product available at: <https://www.trilux.com/EcoDesign>

## Product features and key data

<b>Applications</b>	Offices Banks Foyers Sales rooms Ticket halls Exhibition rooms Educational rooms	
<b>Luminaire type</b>	Surface-mounted LED ceiling luminaire with translucent PMMA cover.	
<b>Mounting method</b>	Surface-mounting	
<b>Luminaire optic</b>	Cover of translucent PMMA with photometrically effective prism structure.	
<b>Light Engine</b>	Level 4	Level 1
<b>Colour temperature</b>	3000 K	4000 K
<b>Rated luminous flux</b>	4000 lm	6000 lm
<b>Connected load</b>	38,00 W	54,00 W
<b>Luminous efficacy</b>	105 lm/W	111 lm/W
<b>Service life</b>	L65 (25 °C) = 50.000 h	
<b>Colour rendering index</b>	80	

## Product features and key data

Colour tolerance	4 SDCM
Photobiological class	Group 0 - no risk
Luminaire colour	RAL9016 Traffic white
Luminaire body	Luminaire body of aluminium.
Electrical version	With electronic control gear unit, switchable.
Wire diameter	1,50 mm <sup>2</sup>
Connection method	Plug-in terminal
Mains frequency	50/60 Hz
Mains voltage	220 - 240 V
Total harmonic distortion < %	14 %
Ingress Protection (IP) rating	IP20
Protection class	I
Impact resistance (IK)	IK02
Hot wire resistance	650 °C
Ambient temperature	25 °C
Max. Luminaires B10	14
Max. Luminaires B16	23
Max. Luminaires C10	24
Max. Luminaires C16	39
Net length	1.502 mm
Net width	302 mm
Net height	50 mm
Weight	4,2 kg

## Light Engine Data

Light Engine	Color temperature	Rated light current	Power supply value Typ	Luminous efficacy
Level 4	3000 K	4000 lm	38,00 W	105 lm/W
Level 3	3000 K	6000 lm	54,00 W	111 lm/W
Level 2	4000 K	4000 lm	38,00 W	105 lm/W
Level 1	4000 K	6000 lm	54,00 W	111 lm/W

### For more sustainability in day-to-day business

New packing



 CO<sub>2</sub> OPTIMISED

 NO PLASTIC

 ONLY ONE MATERIAL

 100% RECYCLABLE



www.trilux-twenty3.com/eco

17.04.2024 Page 2 / 2

All technical data including details of weight and dimensions have been compiled with all due care. Errors excepted. Product illustrations serve as examples and may differ from the original. We reserve the right to make alterations in the interest of improving our products.



**TRILUX**  
SIMPLIFY YOUR LIGHT.

**twenty3**