



2325 G3 C05 OA LED 20/14/08/ML-8MC ET

Planar LED downlight

TOC: 7791140

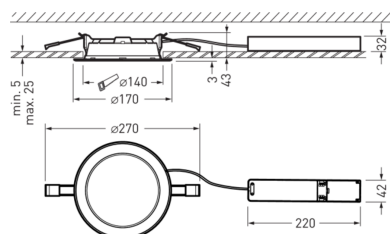

Product description

Luminaire type

LED downlight for ceilings with cavity dimensions ≥ 50 mm.

Mounting methods

Tool-free ceiling installation via rapid-mounting springs. Cut-out opening $\varnothing 140$ mm, Recess depth 43 mm.

Optical system

With opal PMMA cover. With Lambertian light distribution. beam angle 108°.

LED system

Luminaire luminous flux and light color adjustable in 6 levels (Multilumen, Multicolour). Luminaire luminous flux 750 lm - 2000 lm, connected load 8 W - 19 W, Power Faktor $\lambda > 0,95$, maximum luminous efficiency of luminaire 108 lm/W. Light colour warm white or neutral white, correlated colour temperature (CCT) 3000 K or 4000 K, general colour rendering index (CRI) $R_a > 80$. Colour locus tolerance (initial MacAdam) ≤ 4 SDCM. Mean rated service life L70 ($t_a 25^\circ\text{C}$) = 50,000 h. The light source is replaceable according to the ecodesign requirements (VO (EU) 2019/2020).

Luminaire body

Luminaire body of PC. Ceiling ring powder-coated white (similar to RAL 9016). External dimensions of ceiling ring $\varnothing 170$ mm, luminaire height 43 mm. Safety class (EN 61140): I, protection rating (DIN EN 60529): IP20, impact resistance level in accordance with IEC 62262: IK03, testing temperature of wire glow test in accordance with IEC 60695-2-11: 650 °C. Permissible ambient temperature (t_a): 25 °C Weight: 0,4 kg.

Electrical version

With electronic control gear unit, switchable. The control gear unit is replaceable in accordance with the ecodesign requirements (VO (EU) 2019/2020). The luminaire complies with the fundamental requirements of applicable EU regulations and product safety legislation and bears the CE symbol. The luminaire is also ENEC-certified by an independent testing authority.

Disassembly instructions (PDF) for the product available at: <https://www.trilux.com/EcoDesign>

Product features and key data

Luminaire type	LED downlight for ceilings with cavity dimensions ≥ 50 mm.	
Luminaire optic	With opal PMMA cover.	
Light distribution curve	Lambertian (L)	
FWHM	107,60 °	
Light Engine	Level 1	Level 6
Colour temperature	3000 K	4000 K
Rated luminous flux	750 lm	2000 lm
Connected load	8,00 W	19,00 W
Luminous efficacy	94 lm/W	105 lm/W
Rated service life	L70 (25 °C) = 50.000 h	
Colour rendering index	80	
Colour tolerance	4 SDCM	
Photobiological class	Group 0 - no risk	
Luminaire colour	RAL9016 Traffic white	

Product features and key data

Luminaire body	Luminaire body of PC.
Electrical version	With electronic control gear unit, switchable.
Connection method	Plug-in terminal
Mains voltage	220 - 240 V
Mains frequency	50/60 Hz
Total harmonic distortion < %	14 %
Ingress Protection (IP) rating	IP20
Protection rating on room side	IP44
Protection class	I
Impact resistance (IK)	IK03
Hot wire resistance	650 °C
Ambient temperature	25 °C
Max. Luminaires B10	16
Max. Luminaires B16	25
Max. Luminaires C10	26
Max. Luminaires C16	42
Net height	43 mm
Outside diameter	170 mm
Recess depth	43 mm
Weight	0,4 kg
Recessing diameter	140 mm

Available accessories

Material	Description
8120600	Refurbishment plate 2325 C05 G3... . For ceiling cut-outs Ø 160 -200 mm.

Light Engine Data

Light Engine	Color temperature	Rated light current	Power supply value Typ	Luminous efficacy
Level 1	3000 K	750 lm	8,00 W	94 lm/W
Level 2	3000 K	1300 lm	13,00 W	100 lm/W
Level 3	3000 K	1850 lm	19,00 W	97 lm/W
Level 4	4000 K	800 lm	8,00 W	100 lm/W
Level 5	4000 K	1400 lm	13,00 W	108 lm/W
Level 6	4000 K	2000 lm	19,00 W	105 lm/W

EPREL - European Product Registry for Energy Labelling

Energy Efficiency Class

D

Model identifier

MDL-D140-19WDC G1

For more sustainability in day-to-day business

New
packing



CO₂ OPTIMISED



NO PLASTIC



ONLY ONE MATERIAL



100% RECYCLABLE



www.trilux-twenty3.com/eco