TRILUX
SIMPLIFY YOUR LIGHT.

LIVELINK ONE

EN QUICK START GUIDE

10334326 | 231006

CONTENT

Safety information 03

Install the LiveLink One app 04

Connect with LiveLink network 05

Registration 06

Overview 07

Devices 10

Groups – luminaire groups 11

Groups – sensors 14

Groups – pushbuttons 16

Scenes 18

General settings 21

FOR YOUR SAFETY

Explanation of the warning levels

Observe and follow the warnings. Failure to observe the warnings may result in damage to property or malfunctions!

NOTICE. Indicates dangers which can result in material damage or malfunctions.

TIP. Indicates information containing advice or a useful note.

Explanation of instructional pictograms

Short press
Tap the screen briefly with your finger to trigger the action.

Long press
Tap and hold your finger on the screen to trigger the action.

INSTALL THE LIVELINK ONE APP

Download on the App Store

Scan Link

https://apps.apple.com/de/app/livelink-one/id1621987669

GET IT ON Google Play

Scan Link

https://play.google.com/store/apps/details?id=com.trilux.livelink

CONNECT WITH LIVELINK NETWORK

Allow the app to access location data and network access in order to use it.

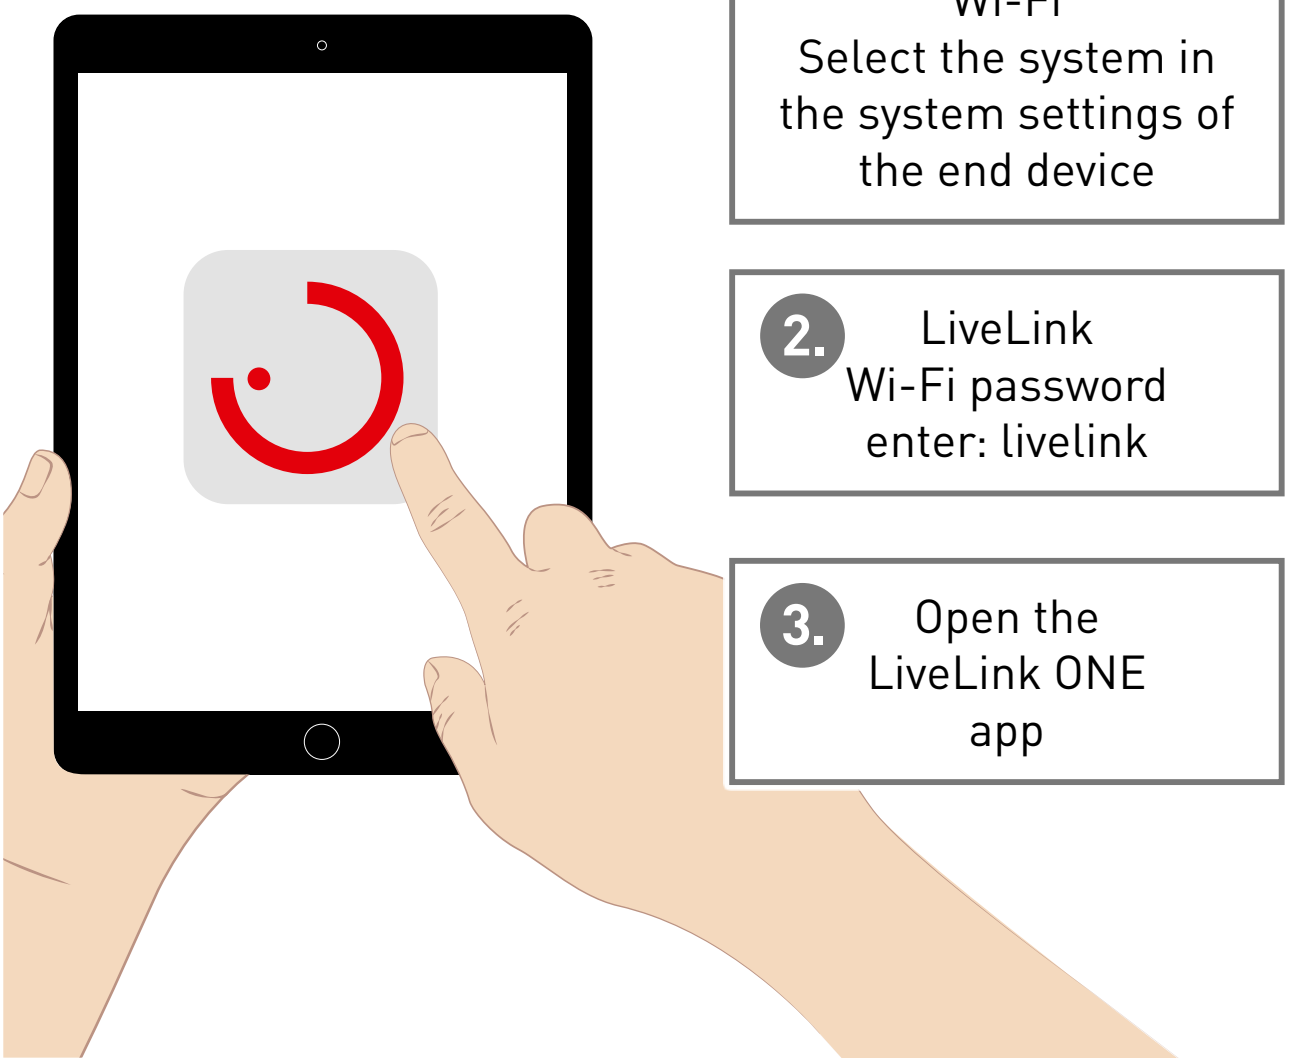

1. LiveLink Wi-Fi
Select the system in the system settings of the end device

2. LiveLink Wi-Fi password enter: livelink

3. Open the LiveLink ONE app

10334326 | 231006 | © trilux.com

REGISTRATION

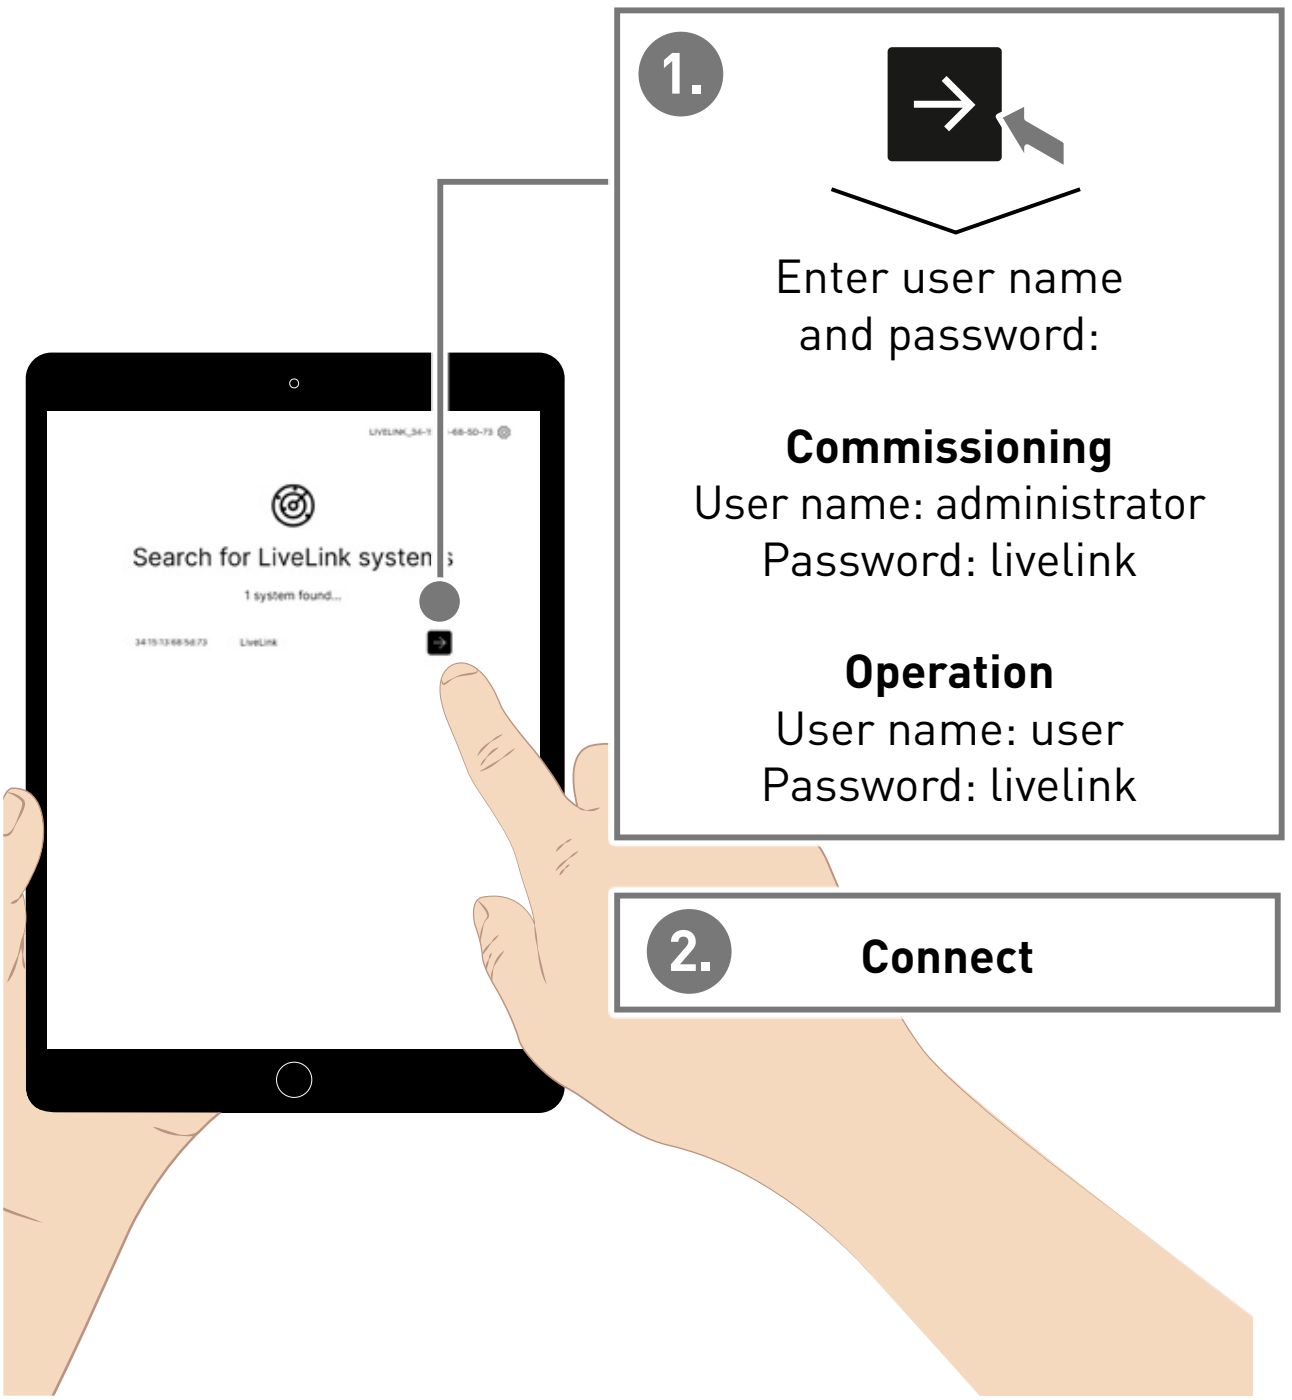

OVERVIEW

The following settings are preconfigured:

- All luminaires are combined into luminaire group G1
- Luminaire group G1 is switched on with the connected sensors depending on movement (with follow-up time 10 minutes) and controlled according to daylight (at 80% illuminance)
- TRILUX HCL curve for HCL luminaires is activated
- Luminaire group G1 can be dimmed and switched with the connected push-buttons

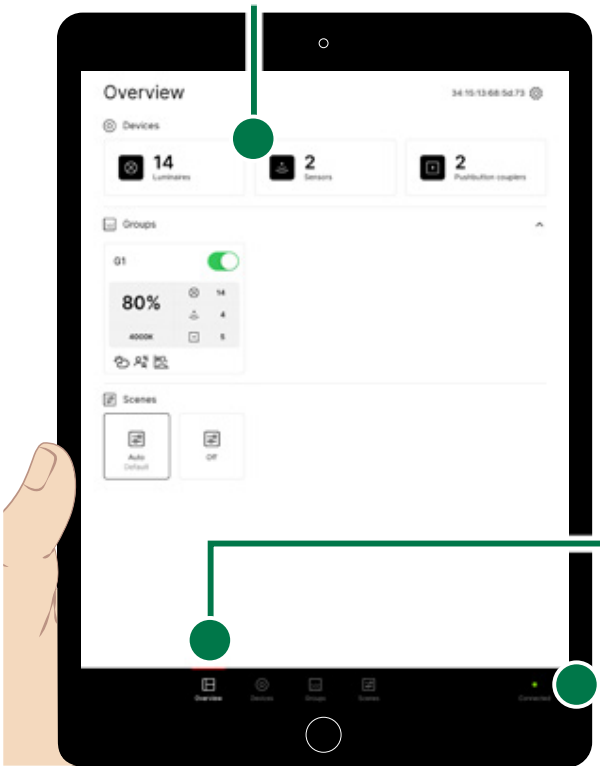

The selected menu item is highlighted red.

The status LED shows the connection to the controller.
Green: Connected
Red: Not connected

OVERVIEW

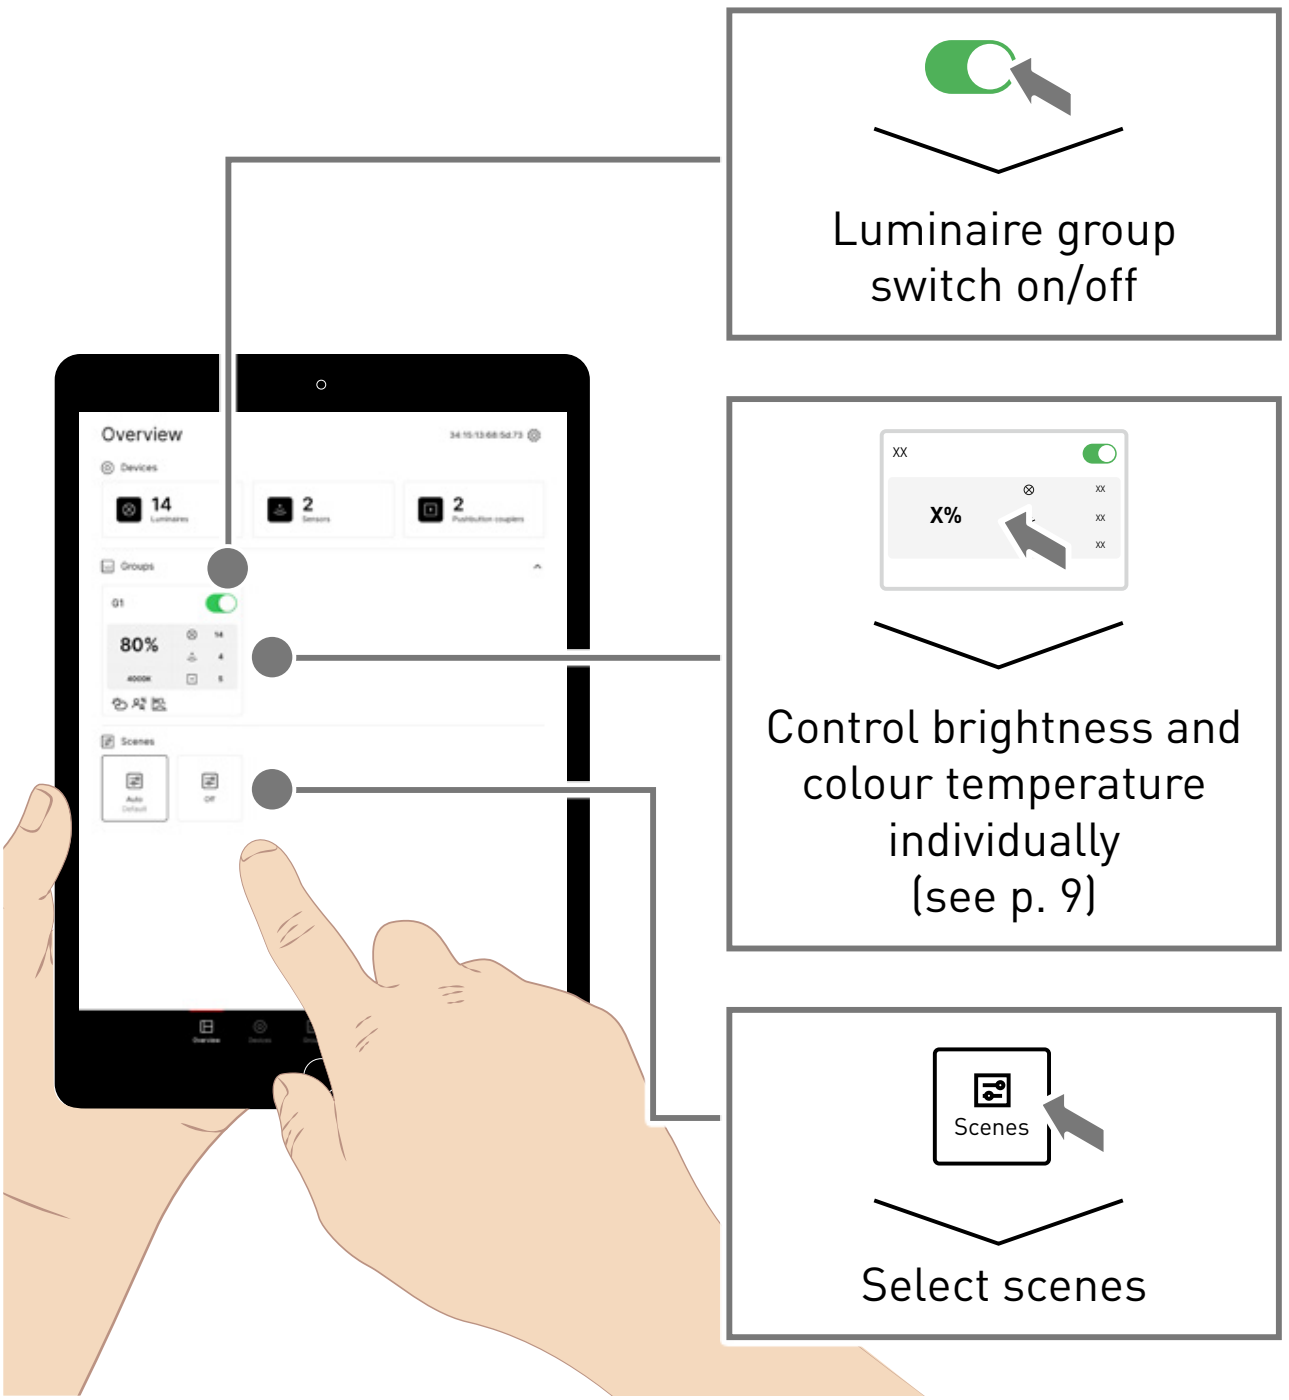
Overview
Devices
14
2
2
Groups
80%
Scenes
Luminaire group switch on/off
XX
X%
Control brightness and colour temperature individually (see p. 9)
Scenes
Select scenes

OVERVIEW

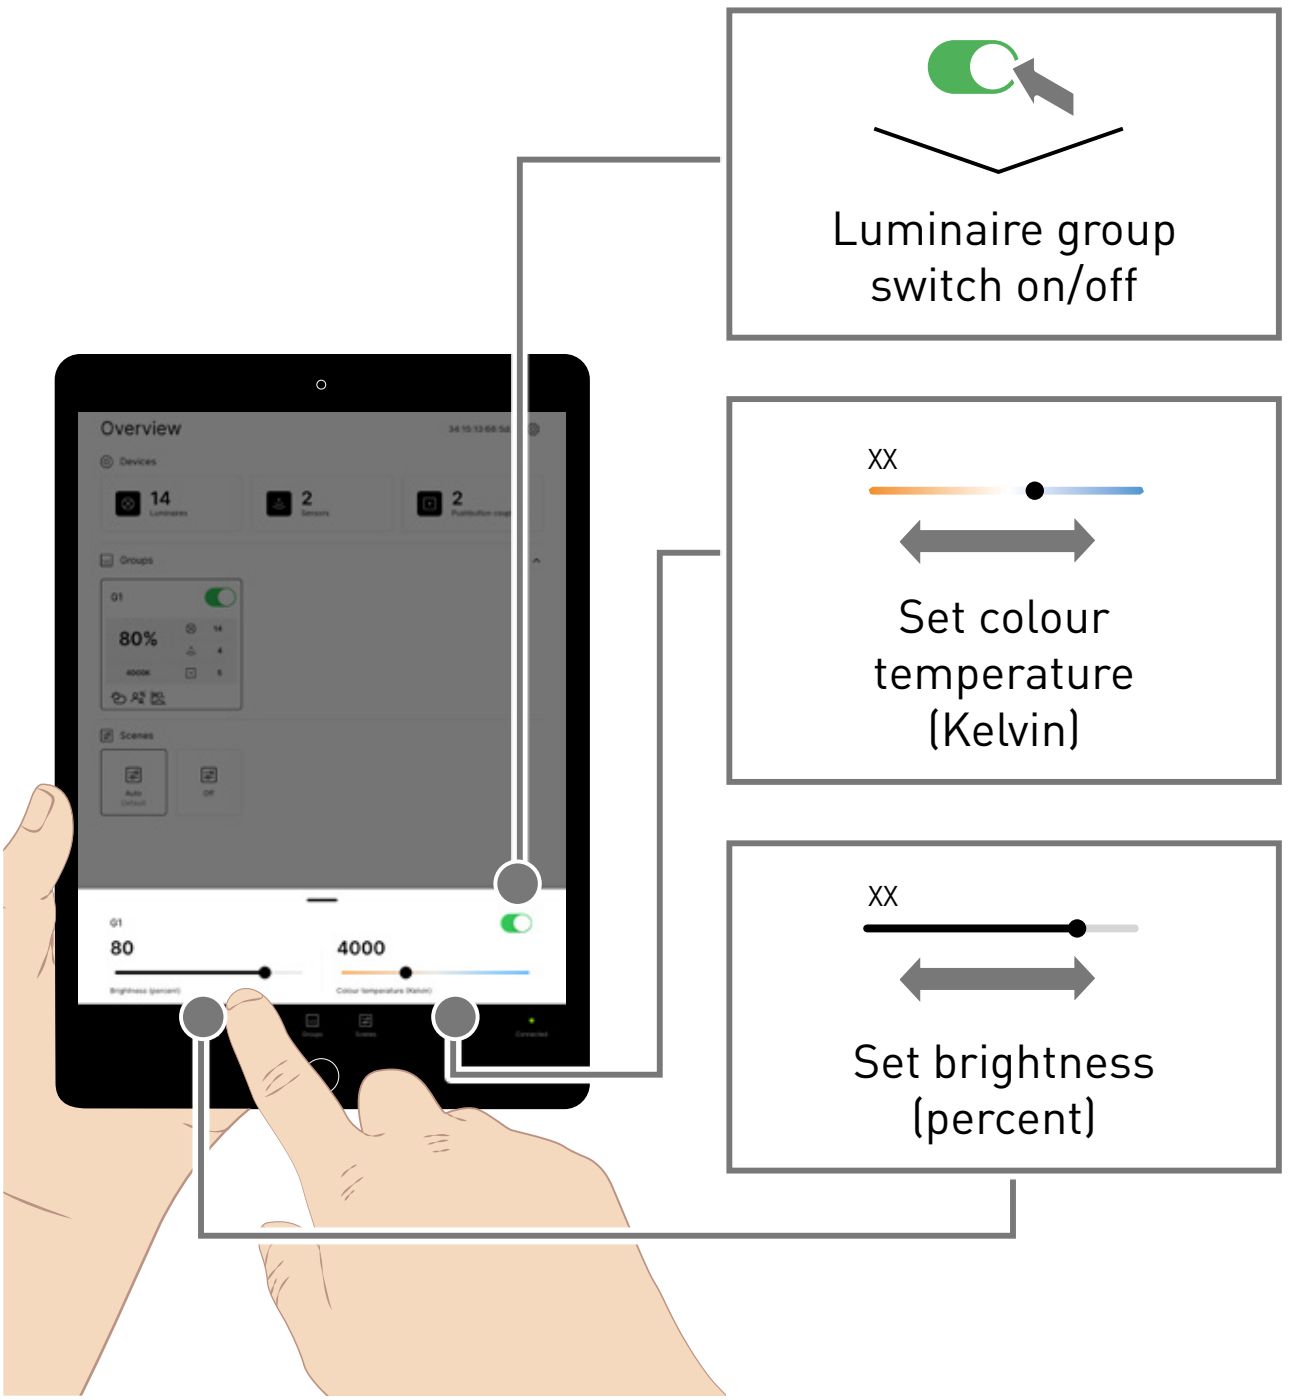

10334326 | 231006 | © trilux.com

DEVICES

All available luminaires (TW= tunable white luminaire, D= dimmable luminaire, E= DALI emergency luminaire), sensors and push-buttons are displayed.

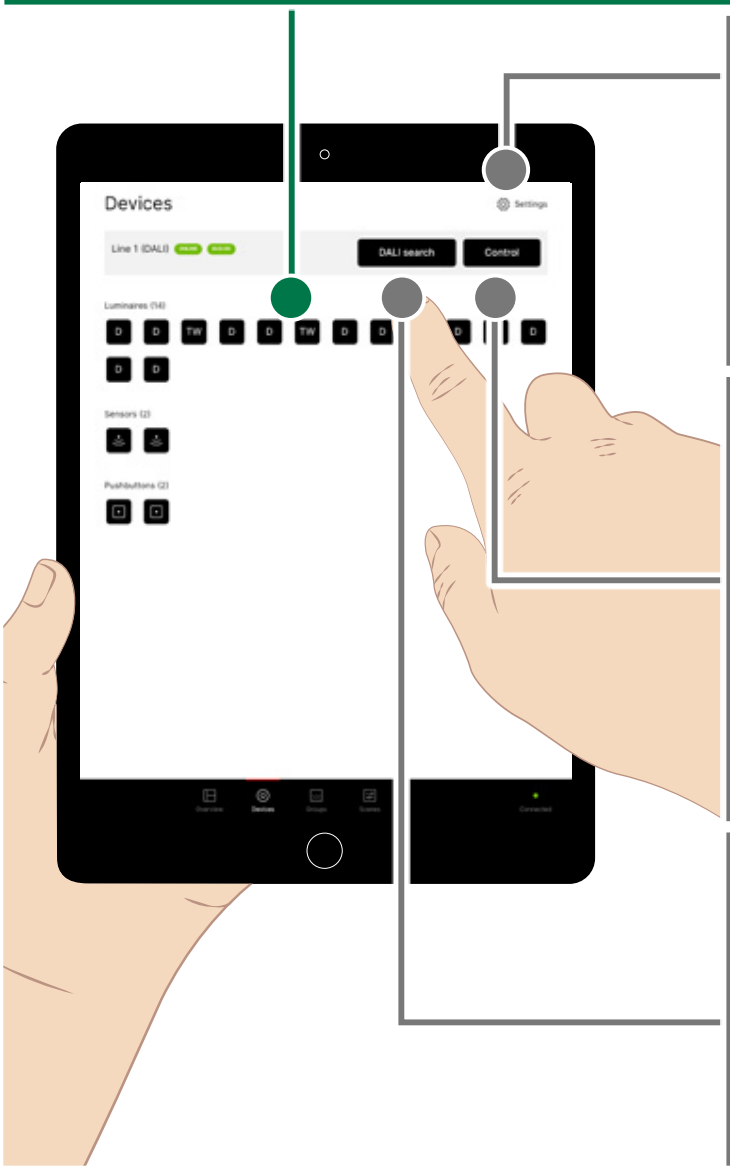

DALI reset with re-addressing

Control

Test function: Switching and dimming of all connected luminaires

DALI search

Search for new DALI devices

GROUPS – LUMINAIRE GROUPS

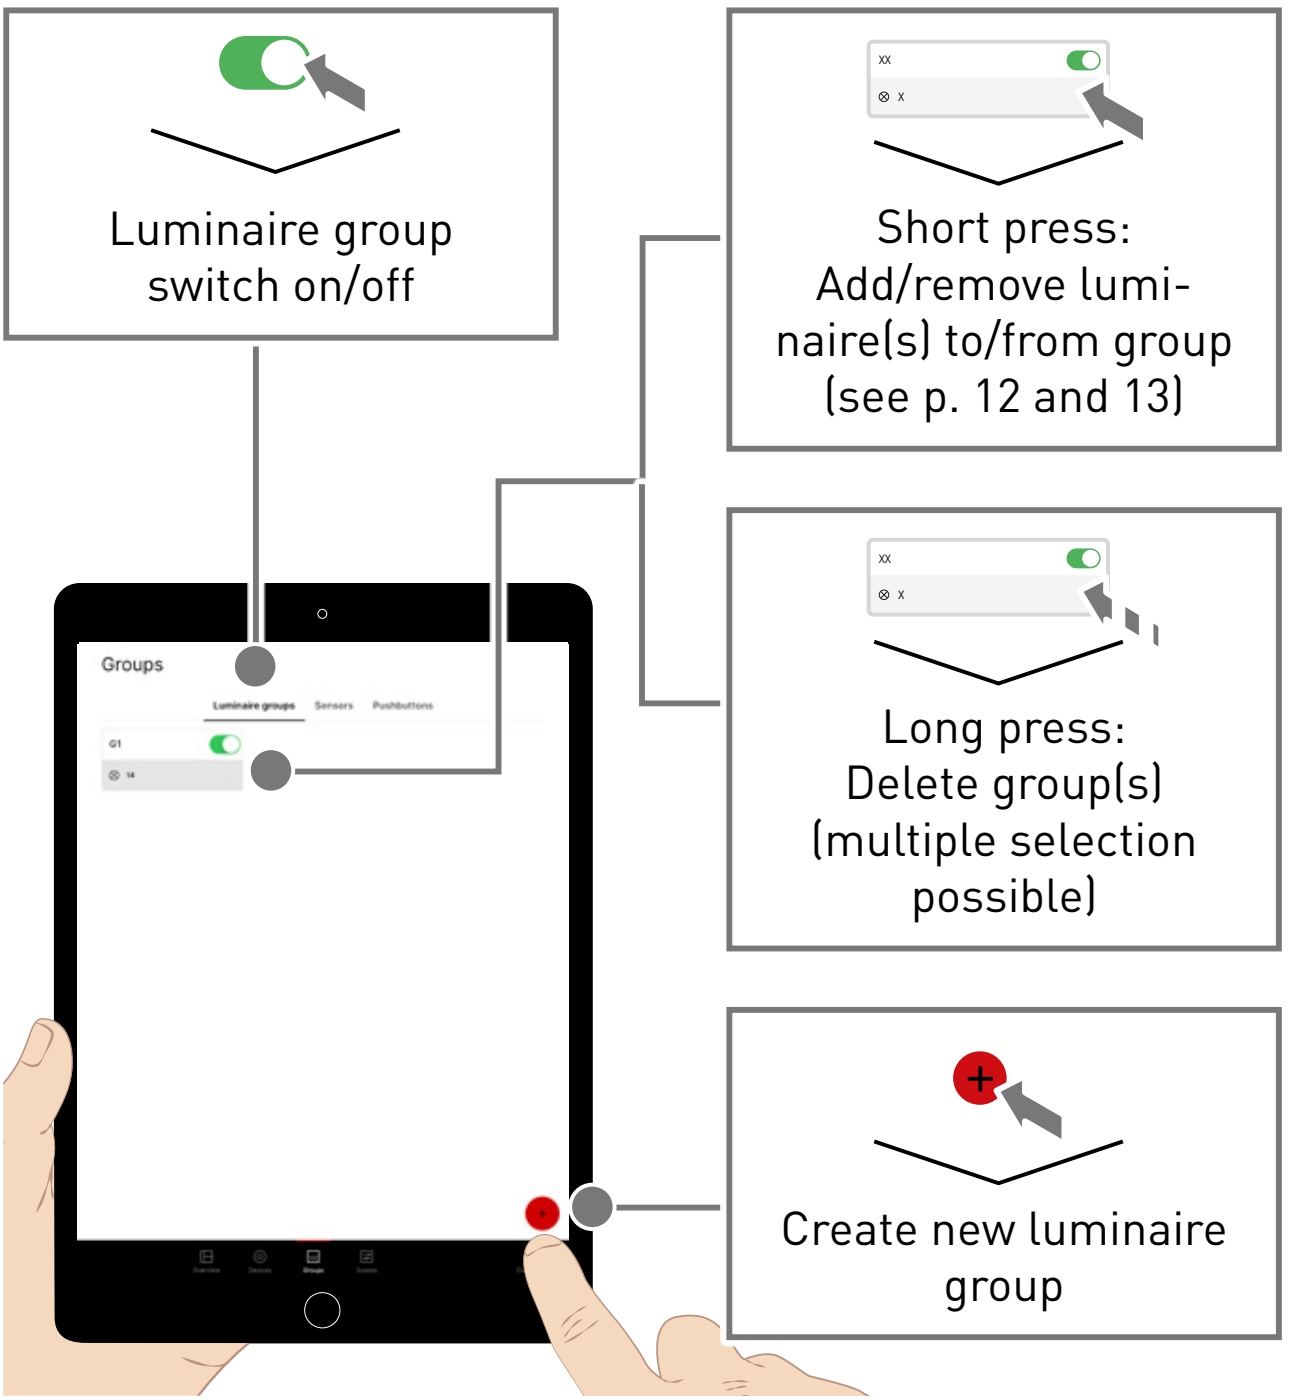

GROUPS – LUMINAIRE GROUPS

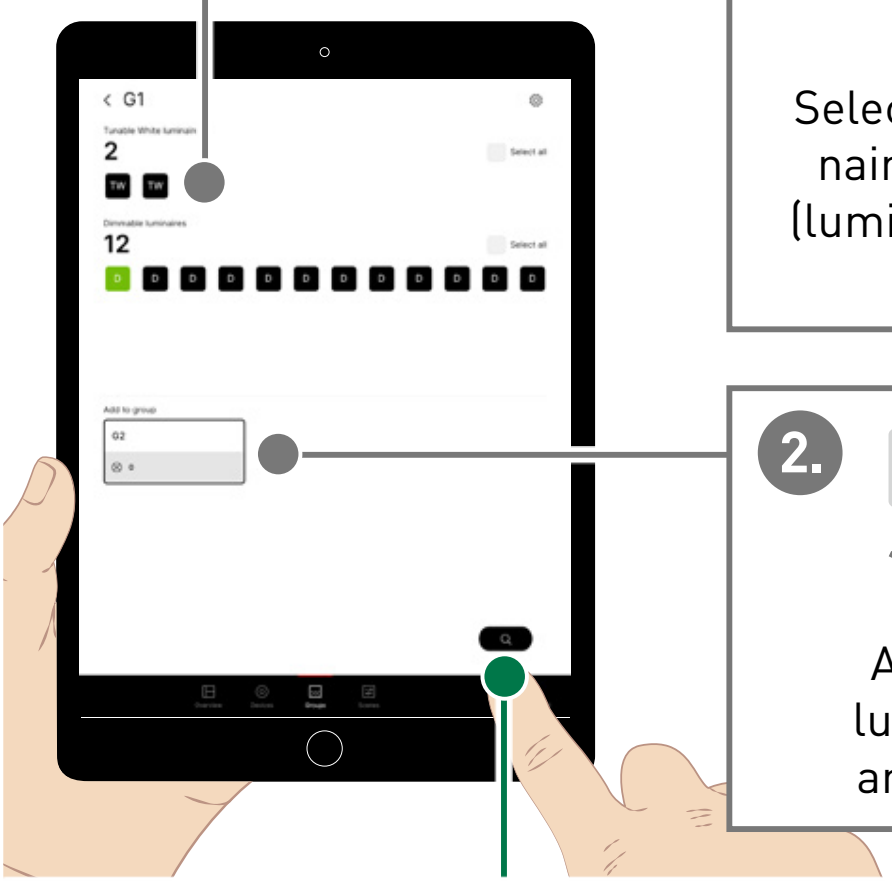

1. TW D E

Select desired luminaire(s) in the app (luminaire flashes to confirm)

2. XX

Add selected luminaire(s) to another group

Clicking on the magnifying glass starts automatic mode. This helps with assignment of the luminaires. (see p. 13)

GROUPS – LUMINAIRE GROUPS

When automatic mode is activated, the first luminaire flashes and can be added to a desired group. When this is done the second light flashes, and so on.

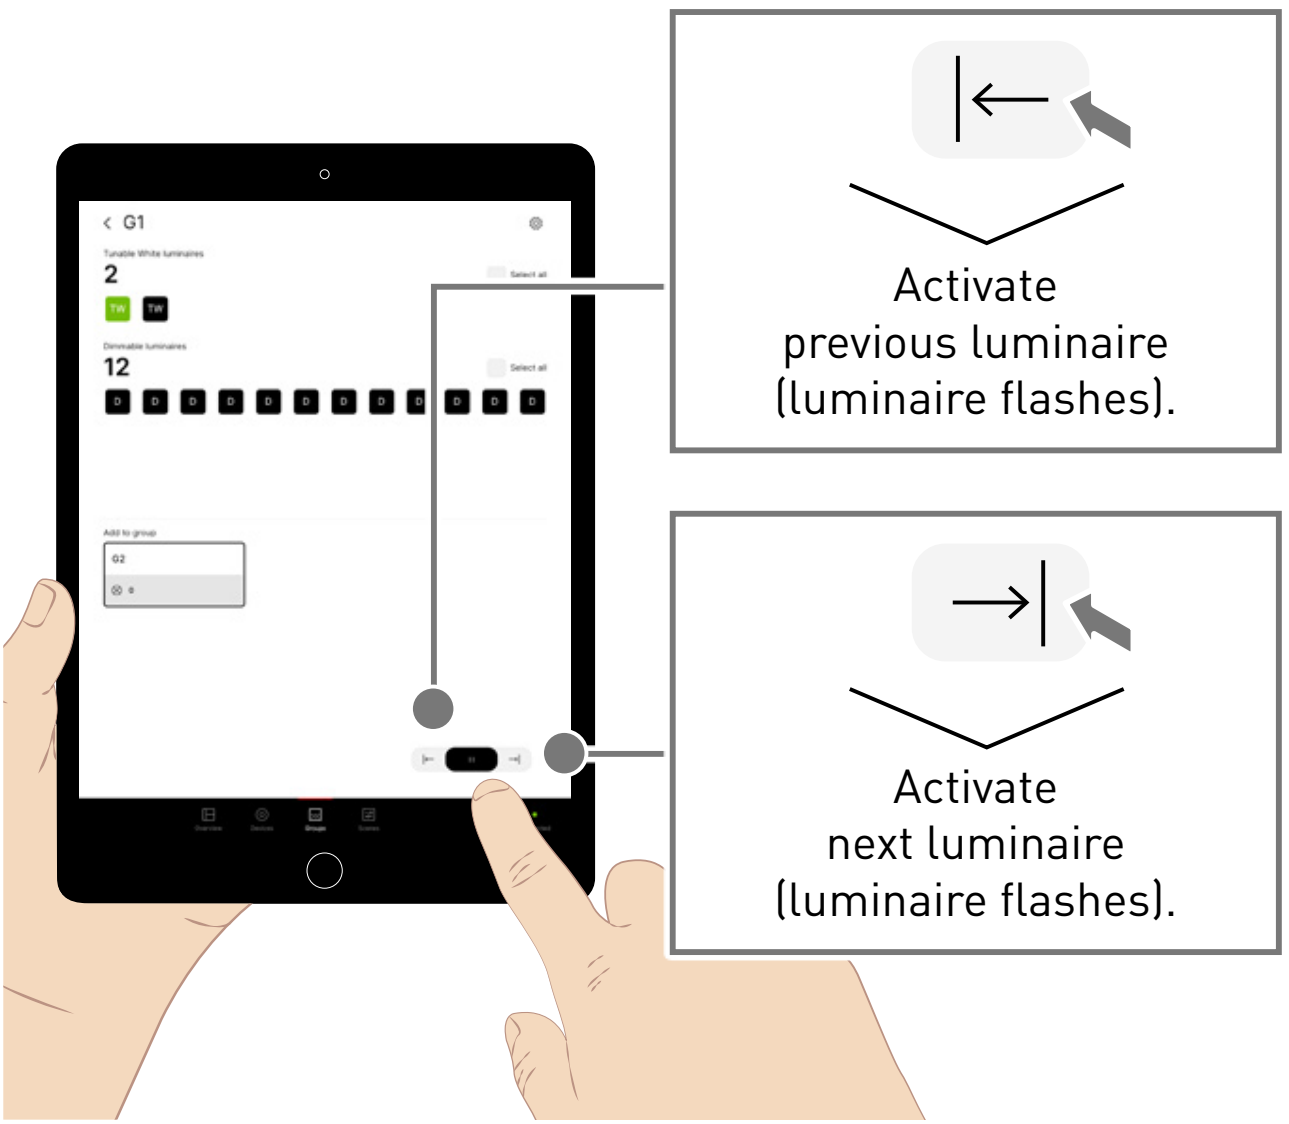

10334326 | 231006 | © trilux.com

GROUPS – SENSORS

When a movement is detected, the green symbol appears.

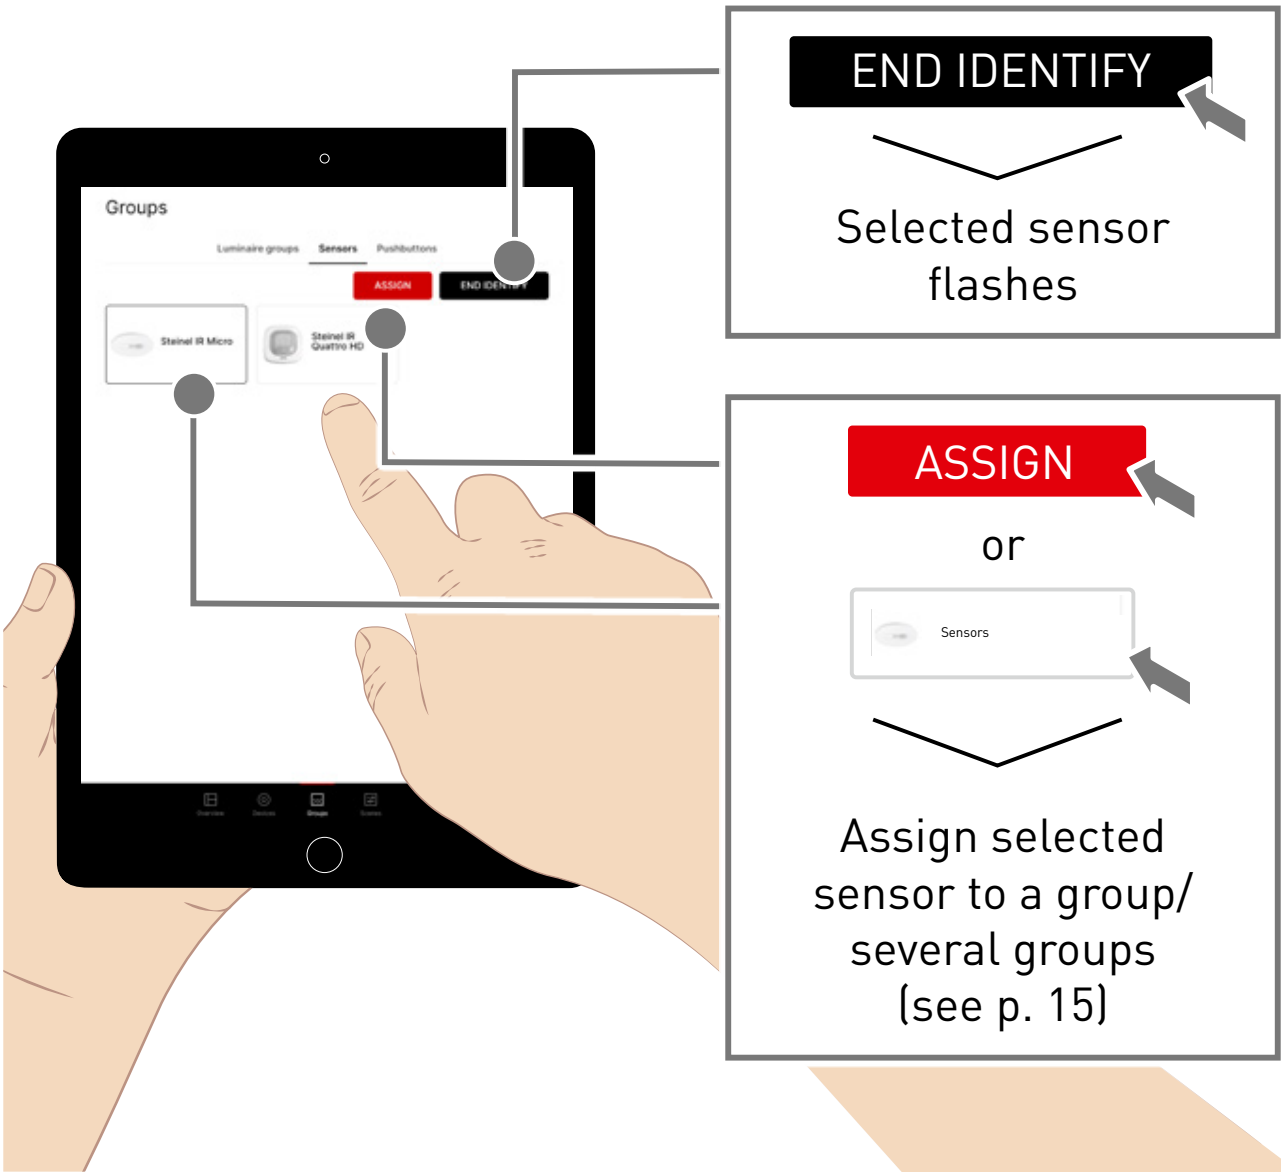

GROUPS – SENSORS

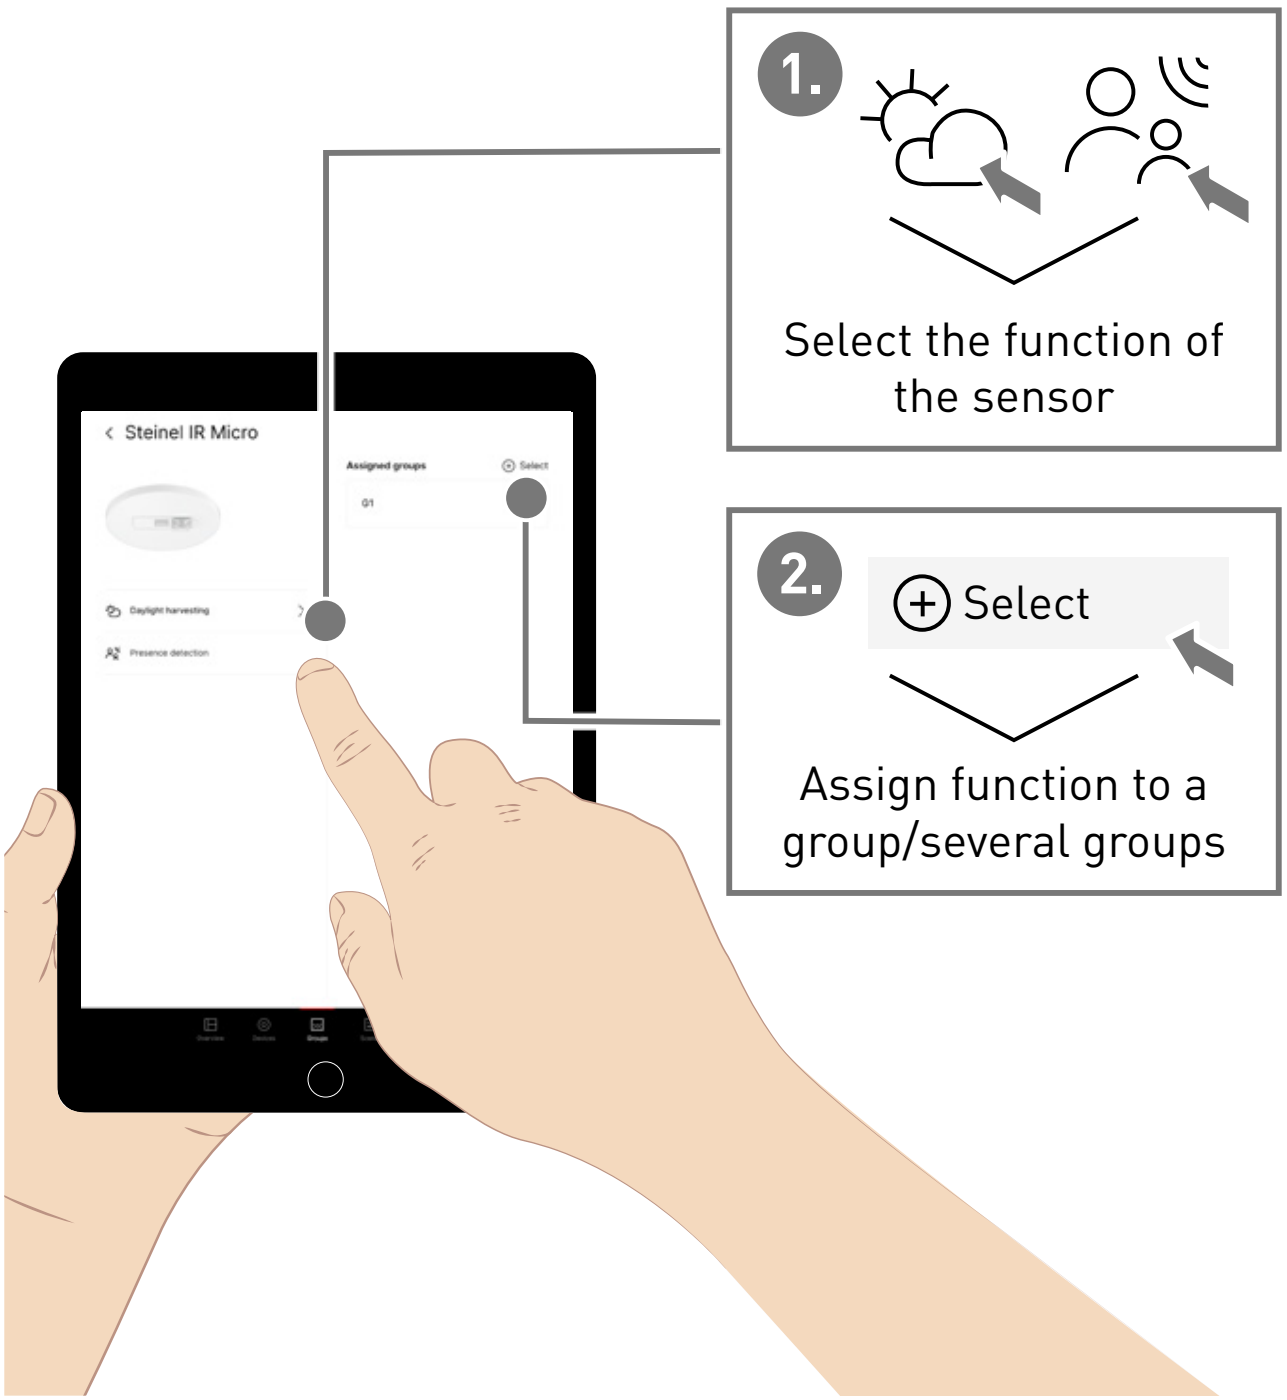

GROUPS – PUSHBUTTONS

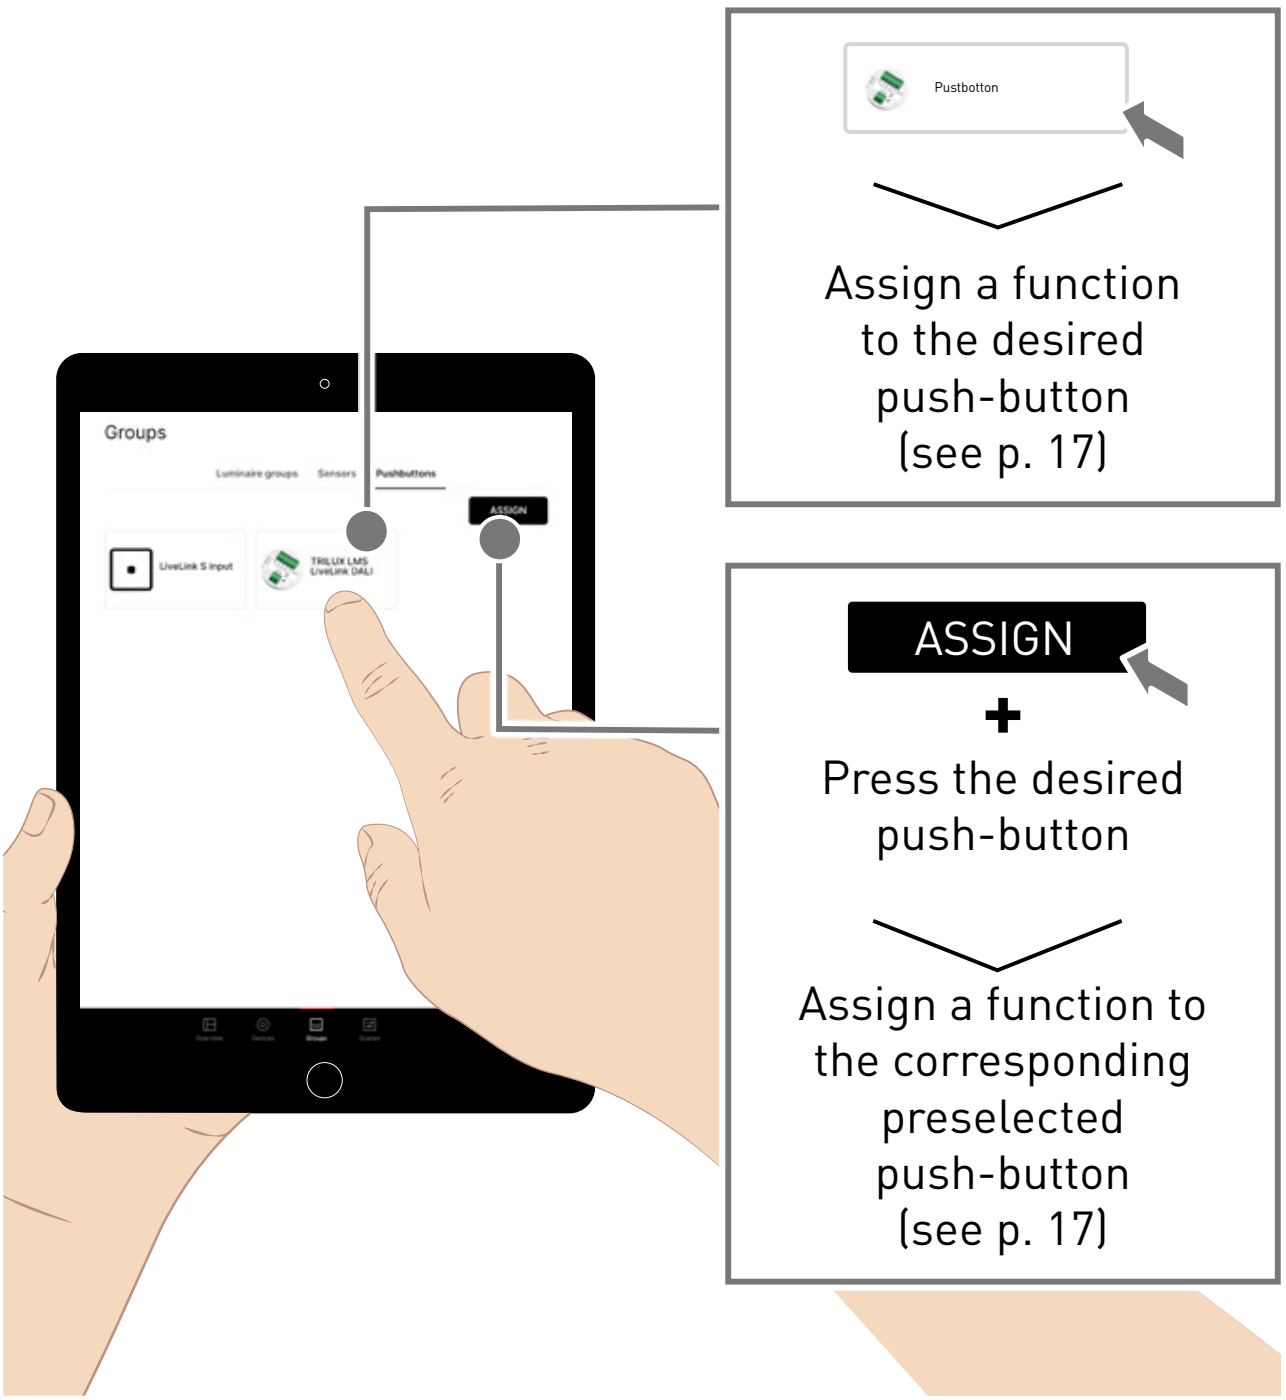

GROUPS – PUSHBUTTONS

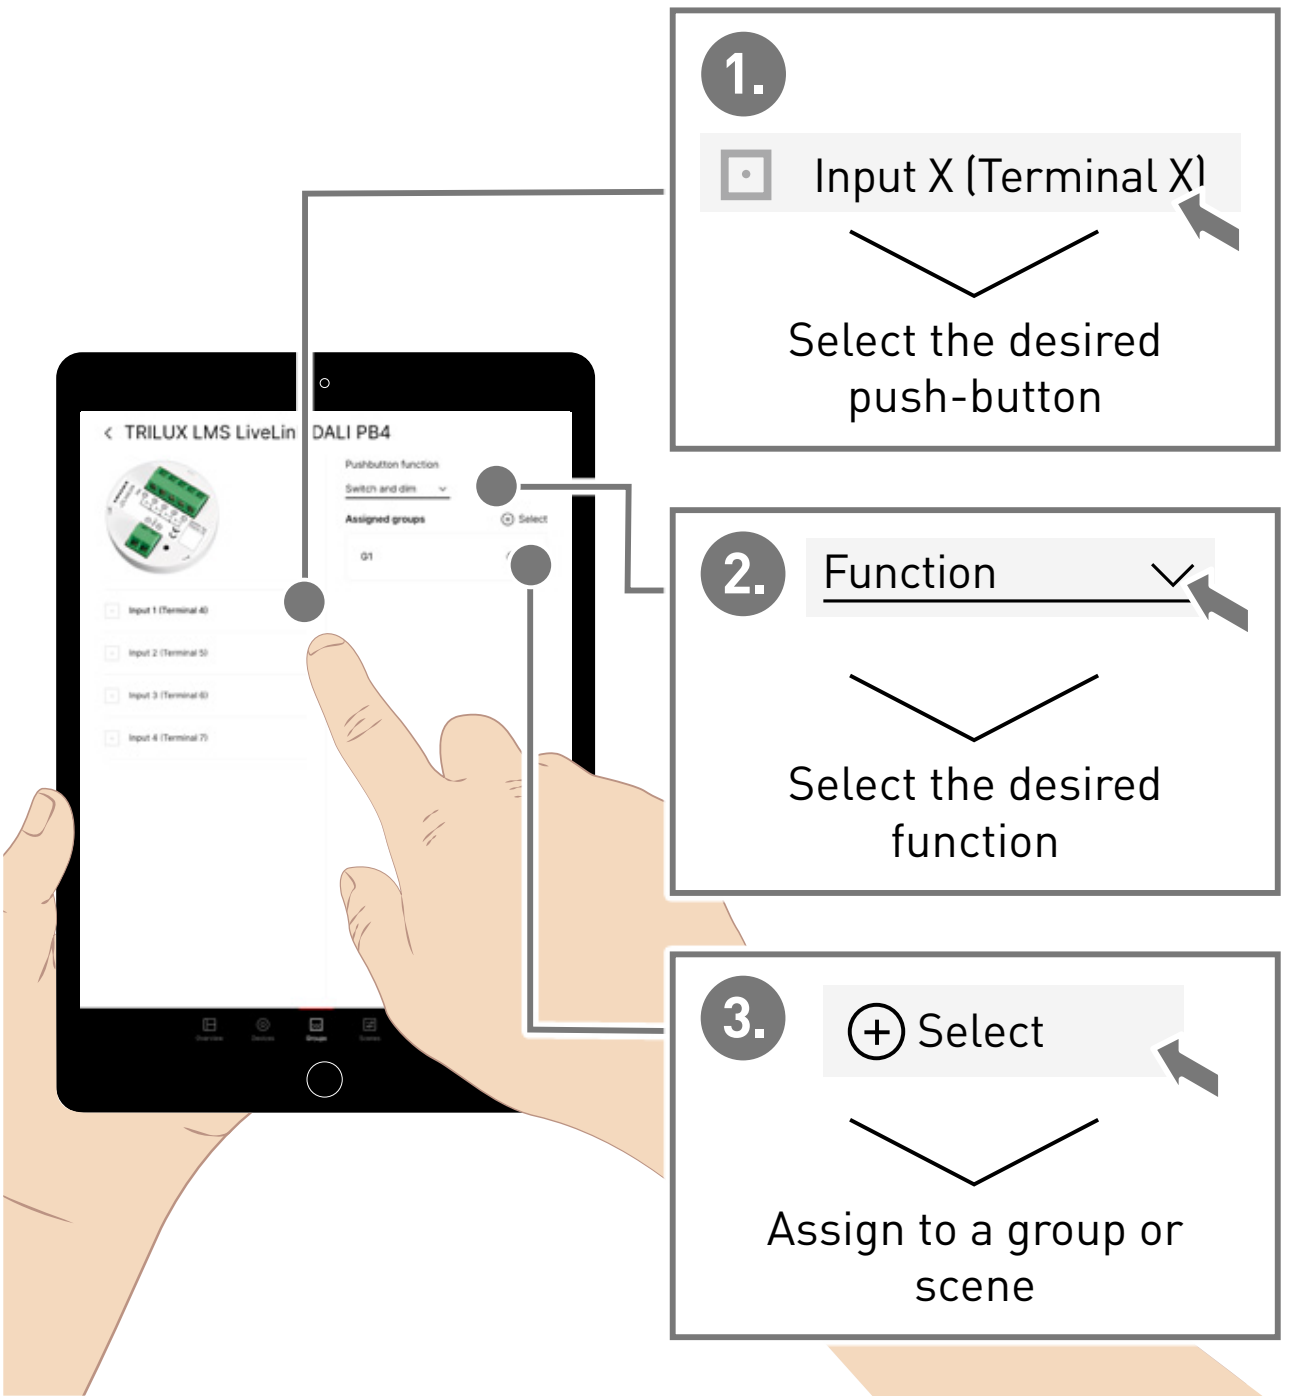

SCENES

Add scene

Create new scene

Scene
Gruppe X

Short press:
Configure scene
(see page 19)

Scene
Gruppe X

Long press:
Delete scene(s)/
set default/apply
(multiple selection
possible)

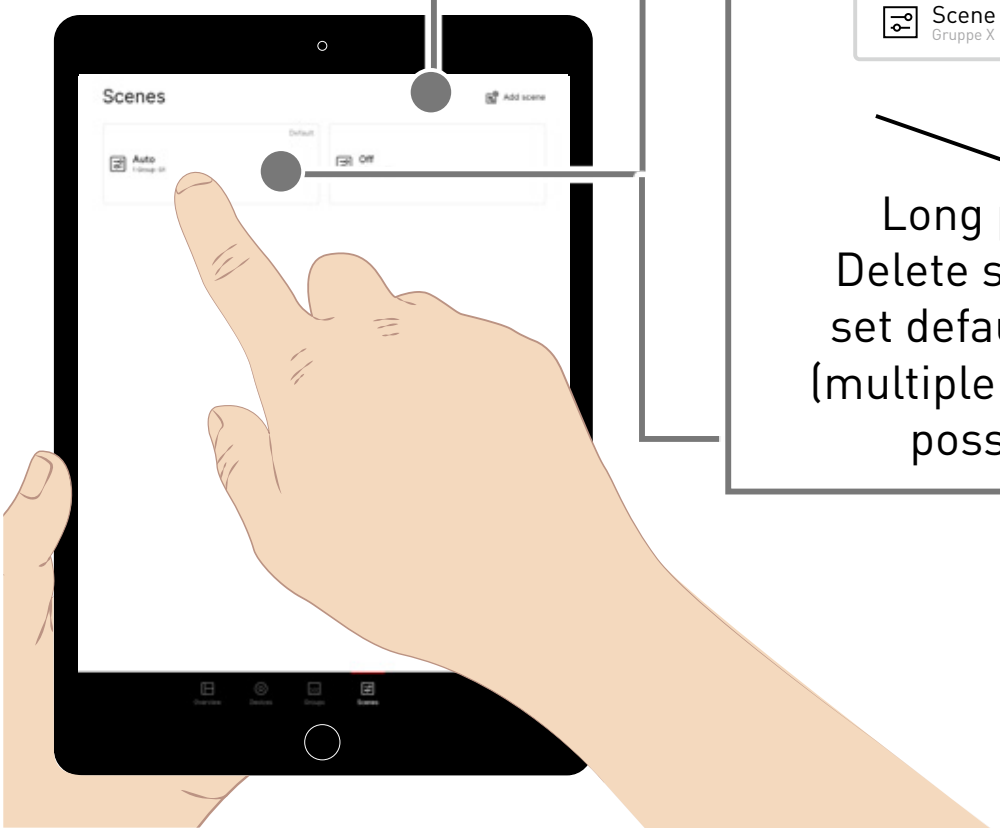

10334326 | 231006 | © trilux.com

SCENES

Select group

Add one or more groups

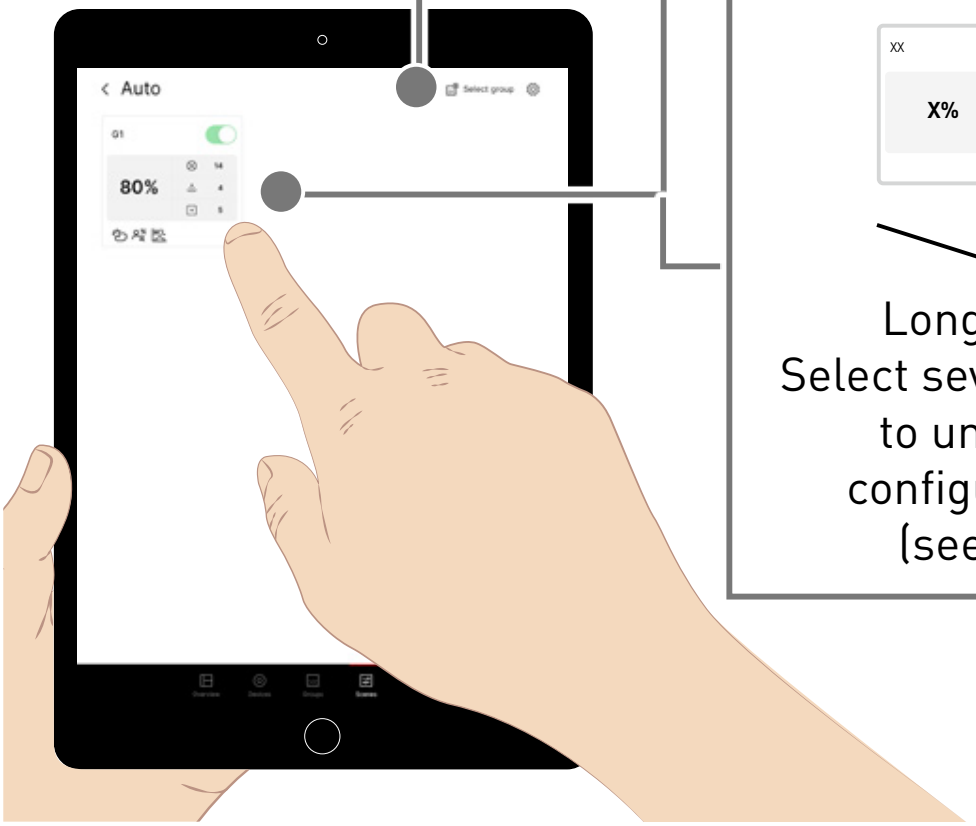



Short press:
Configure group in the scene (see p. 20)

Long press:
Select several groups to uniformly configure them (see p. 20)

10334326 | 231006 | © trilux.com

SCENES

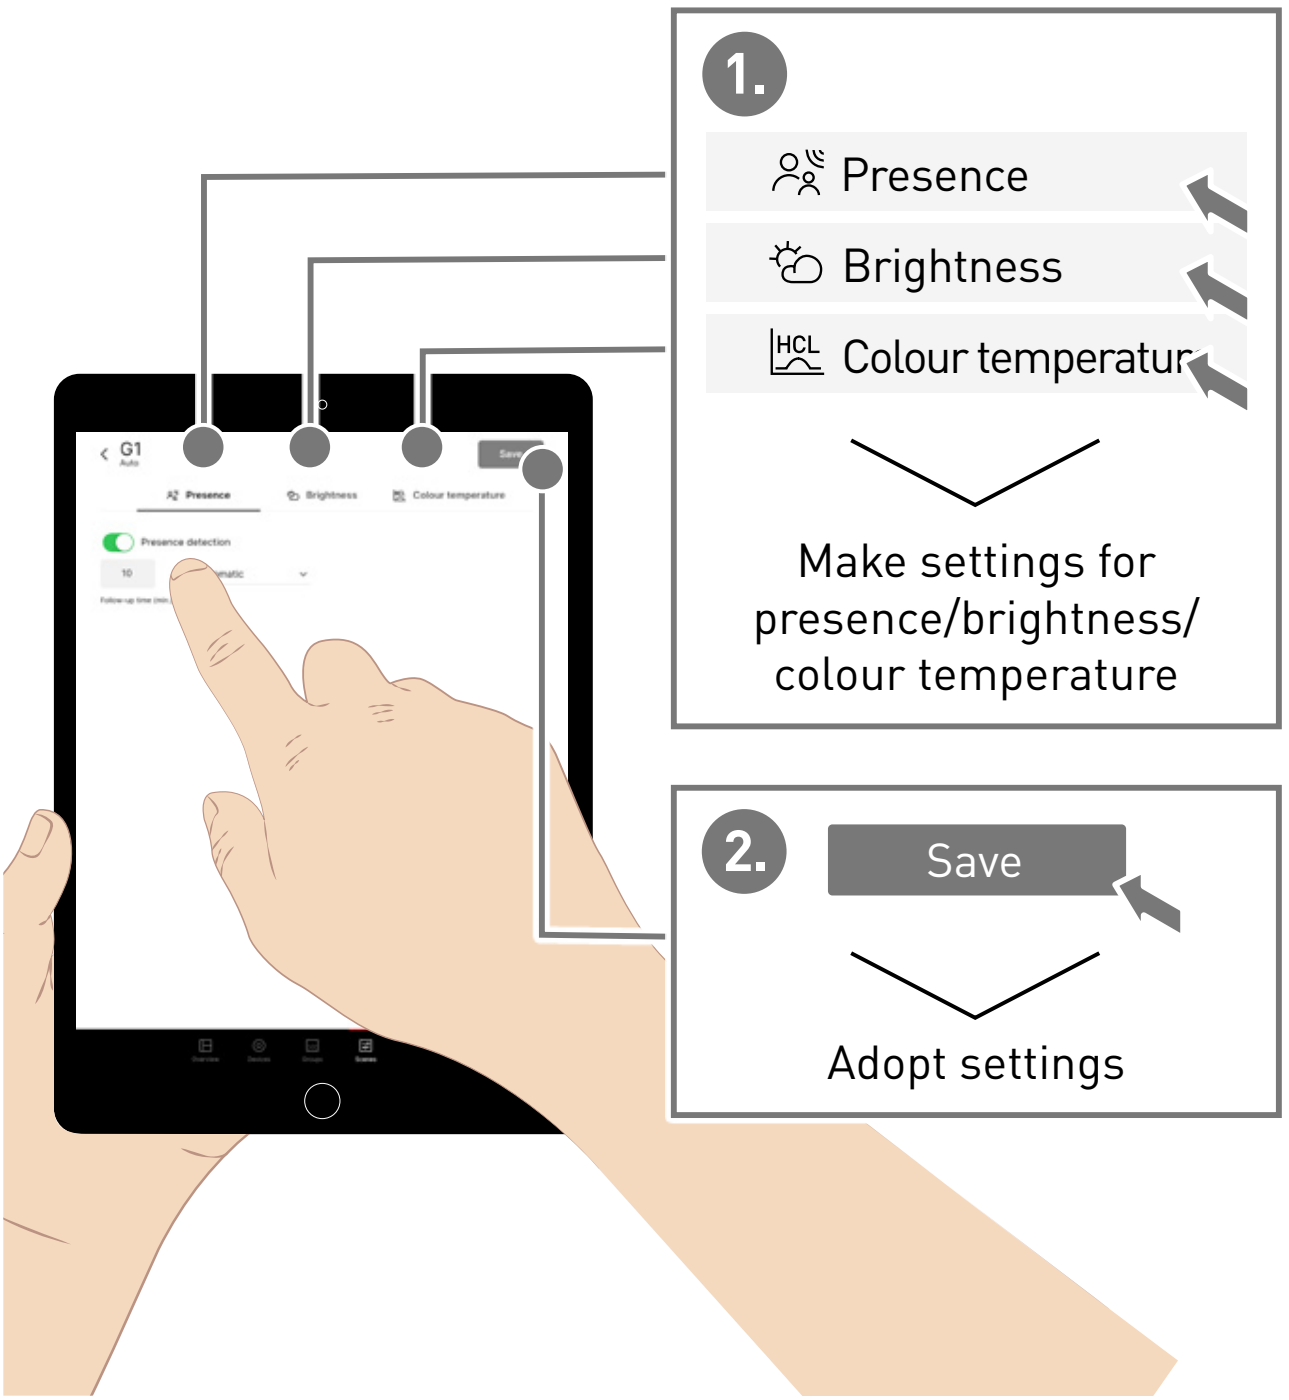
1.
Presence
Brightness
HCL
Colour temperatur
Make settings for presence/brightness/ colour temperature
2.
Save
Adopt settings
G1
Presence
Brightness
Colour temperature
Presence detection

GENERAL SETTINGS

1. Open settings menu

2. Make desired settings
   - User administration
   - Commissioning protocol
   - Reset configuration
   - Disconnect connection

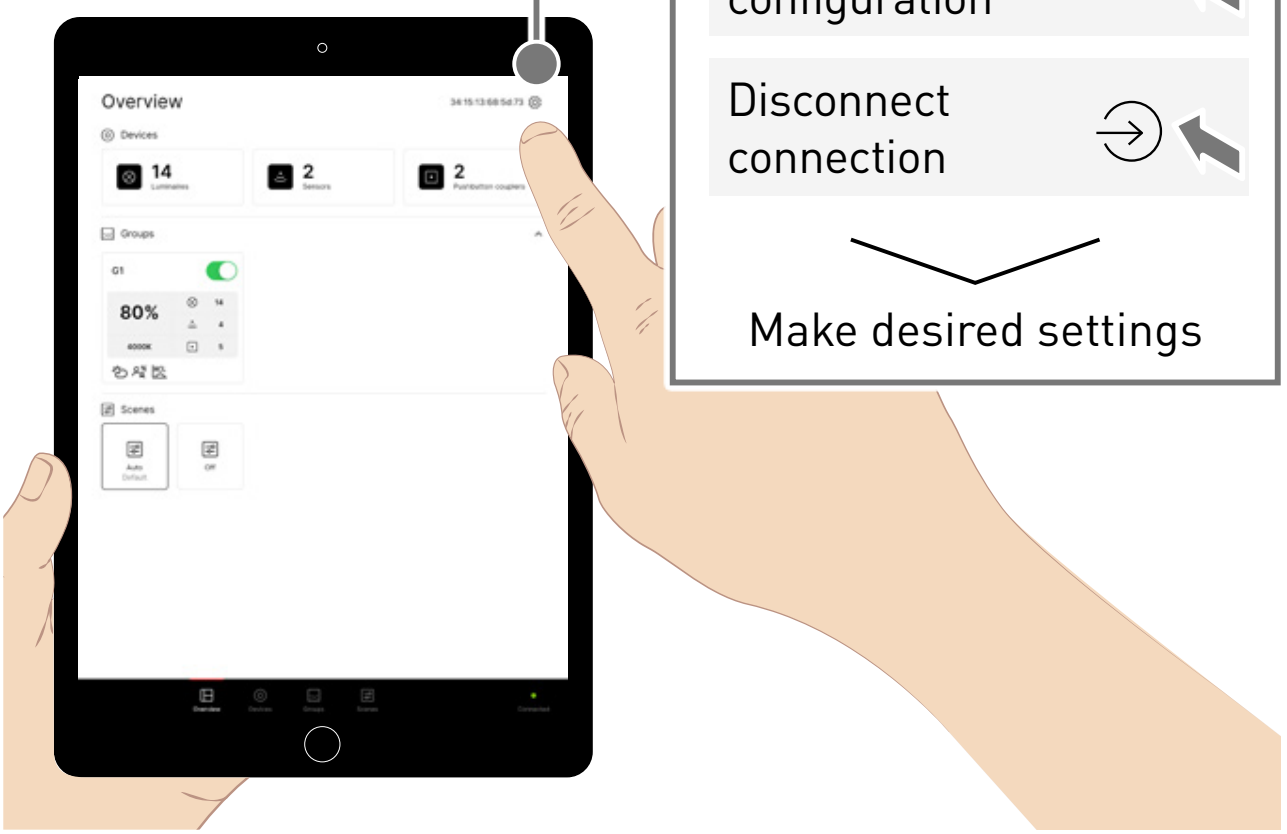

10334326 | 231006 | © trilux.com

TRILUX GmbH & Co. KG

Heidestraße
D-59759 Arnsberg
+49 2932 301-0
info@trilux.com
www.trilux.com